

ME 2580 Dynamics

Curvilinear Motion – Rectangular Components


General Concepts:

Position, Velocity, and Acceleration

If a particle does not move in a straight line, then its motion is said to be **curvilinear**. Given $\underline{r}(t)$ the position vector of a particle P , the velocity and acceleration of P are defined to be

$$\underline{v} = \frac{d\underline{r}}{dt} \quad \text{and} \quad \underline{a} = \frac{d\underline{v}}{dt}.$$

The **velocity** \underline{v} is **tangent** to the path of P at all times. The **acceleration** \underline{a} is generally not tangent to the path.

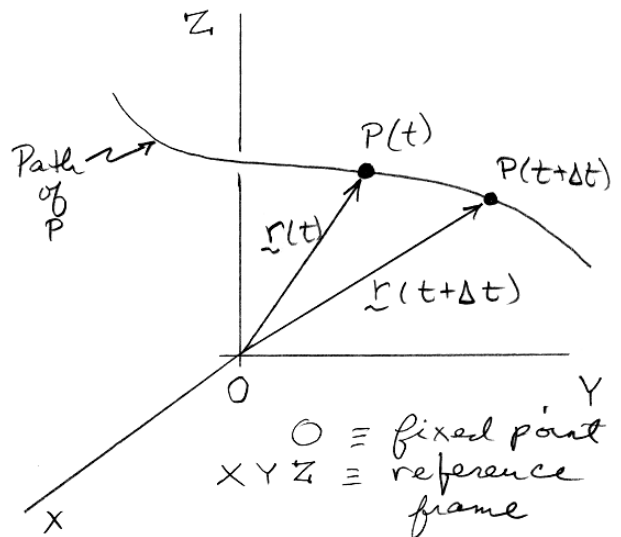


Rectangular Components

If we use rectangular components, then the position, velocity, and acceleration vectors may be written as

$$\underline{r}(t) = x(t)\underline{i} + y(t)\underline{j} + z(t)\underline{k}$$

$$\underline{v}(t) = \dot{x}(t)\underline{i} + \dot{y}(t)\underline{j} + \dot{z}(t)\underline{k}$$

$$\underline{a}(t) = \ddot{x}(t)\underline{i} + \ddot{y}(t)\underline{j} + \ddot{z}(t)\underline{k}$$

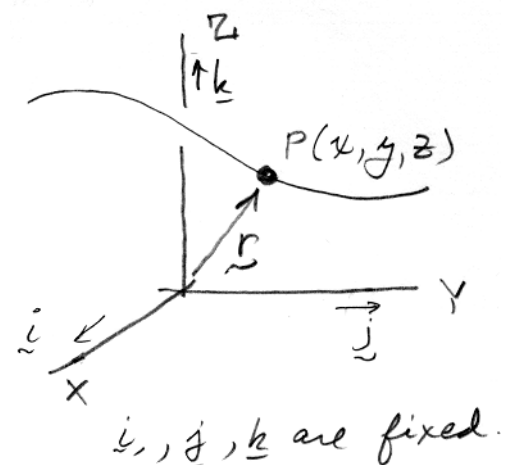

Note that the methods for straight-line (rectilinear) motion can be applied in each direction.

Example: The Projectile Problem

If we *neglect air resistance*, the motion of a projectile can be analyzed using the equations for constant acceleration. The *horizontal motion* (X-direction) occurs at a *constant velocity*, and the *vertical motion* (Y-direction) occurs at a *constant acceleration*. The equations that apply in the X and Y directions are

X-direction: (constant velocity, v_{x_0})

$$x(t) = x_0 + v_{x_0} t$$

Y-direction: (constant acceleration, $-g$)

$$v_y(t) = v_{y_0} - gt \quad y(t) = y_0 + v_{y_0} t - \frac{1}{2} g t^2 \quad v_y^2 = v_{y_0}^2 - 2g(y - y_0)$$

Derivative of a Rotating Unit Vector

Given the unit vector

$$\underline{e} = \cos(\theta) \underline{i} + \sin(\theta) \underline{j}$$

we can *differentiate* with respect to time to get

$$\dot{\underline{e}} = -\dot{\theta} \sin(\theta) \underline{i} + \dot{\theta} \cos(\theta) \underline{j} = \dot{\theta} (-\sin(\theta) \underline{i} + \cos(\theta) \underline{j}) = \dot{\theta} \underline{e}_\perp$$

But, we also note that $\underline{e}_\perp = \underline{k} \times \underline{e}$, so that we can write

$$\dot{\underline{e}} = \dot{\theta} (\underline{k} \times \underline{e}) = (\dot{\theta} \underline{k}) \times \underline{e} = \underline{\omega} \times \underline{e}$$

Here, $\underline{\omega}$ is the *angular velocity* of the unit vector set $(\underline{e}, \underline{e}_\perp)$.

