


ME 360 Control Systems: Equation Sheet II

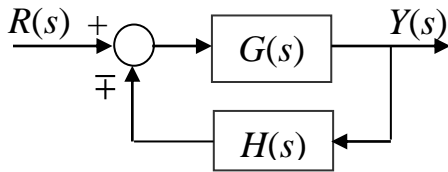

Closed Loop Transfer Function

$$\frac{G}{1 \pm GH} = \frac{(N_G / D_G)}{1 \pm (N_G N_H / D_G D_H)} = \frac{N_G D_H}{D_G D_H \pm N_G N_H}$$

Sensitivity

$$S_\alpha^T = \frac{\alpha}{T} \left(\frac{\partial T}{\partial \alpha} \right)$$

Quotient Rule

$$\frac{d}{dx} \left(\frac{u}{v} \right) = \frac{v \left(\frac{du}{dx} \right) - u \left(\frac{dv}{dx} \right)}{v^2}$$

Overshoot for Second-Order Systems

$$T(s) = \frac{K}{s^2 + 2\zeta\omega_n s + \omega_n^2} \quad \text{Case 1 (Fig. 5.8)}$$

$$T(s) = \frac{K(s+a)}{s^2 + 2\zeta\omega_n s + \omega_n^2} \quad \text{Case 2 (Fig. 5.13)}$$

System Type and Steady-State Error

$$GH(s) = \frac{N(s)}{s^n D(s)}$$

| Type (n) | Steady State System Error | | |
|----------|---------------------------|----------|-----------|
| | Step | Ramp | Parabolic |
| 0 | finite | ∞ | ∞ |
| 1 | 0 | finite | ∞ |
| 2 | 0 | 0 | finite |
| 3 | 0 | 0 | 0 |

Time Constants/Settling Times

First Order System

$$\tau = 1/a$$

$$T_s = 4\tau = 4/a$$

Second Order System

$$\tau = 1/\zeta\omega_n$$

$$T_s = 4\tau = 4/\zeta\omega_n$$

Coefficients for ITAE Optimal Performance (Step Input)

$$T(s) = \frac{b_0}{s^n + b_{n-1}s^{n-1} + \dots + b_1s + b_0}$$

| Order | Form of Denominator |
|-------|--|
| 2 | $s^2 + 1.4\omega_n s + \omega_n^2$ |
| 3 | $s^3 + 1.75\omega_n s^2 + 2.15\omega_n^2 s + \omega_n^3$ |
| 4 | $s^4 + 2.1\omega_n s^3 + 3.4\omega_n^2 s^2 + 2.7\omega_n^3 s + \omega_n^4$ |
| 5 | $s^5 + 2.8\omega_n s^4 + 5.0\omega_n^2 s^3 + 5.5\omega_n^3 s^2 + 3.4\omega_n^4 s + \omega_n^5$ |
| 6 | $s^6 + 3.25\omega_n s^5 + 6.60\omega_n^2 s^4 + 8.6\omega_n^3 s^3 + 7.45\omega_n^4 s^2 + 3.95\omega_n^5 s + \omega_n^6$ |

Complex Roots

$$-\sigma \pm j\omega = -\zeta\omega_n \pm j\omega_n \sqrt{1 - \zeta^2}$$

$$\omega_n = \sqrt{\sigma^2 + \omega^2}$$

$$\zeta = \sigma / \omega_n$$

Coefficients for ITAE Optimal Performance (Ramp Input)

$$T(s) = \frac{b_1 s + b_0}{s^n + b_{n-1} s^{n-1} + \dots + b_1 s + b_0}$$

| Order | Form of Denominator |
|-------|--|
| 2 | $s^2 + 3.2\omega_n s + \omega_n^2$ |
| 3 | $s^3 + 1.75\omega_n s^2 + 3.25\omega_n^2 s + \omega_n^3$ |
| 4 | $s^4 + 2.41\omega_n s^3 + 4.93\omega_n^2 s^2 + 5.14\omega_n^3 s + \omega_n^4$ |
| 5 | $s^5 + 2.19\omega_n s^4 + 6.5\omega_n^2 s^3 + 6.3\omega_n^3 s^2 + 5.24\omega_n^4 s + \omega_n^5$ |