

ME 6590 Multibody Dynamics


Angular Acceleration Using Relative Coordinates

Angle Derivatives as Generalized Speeds: 1-2-3 Rotation Sequence

Consider the two-body system shown. The fixed-frame components of the angular velocities of the bodies can be written as

$$\{\omega_{B_1}\} = [\omega_{B_1, \dot{\theta}_{B_1}}] \{\dot{\theta}_{B_1}\} + [\omega_{B_1, \dot{\theta}_{B_2}}] \{\dot{\theta}_{B_2}\}$$

$$\{\omega_{B_2}\} = [\omega_{B_2, \dot{\theta}_{B_1}}] \{\dot{\theta}_{B_1}\} + [\omega_{B_2, \dot{\theta}_{B_2}}] \{\dot{\theta}_{B_2}\}$$

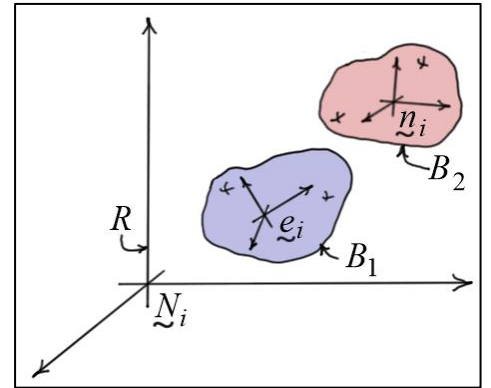

with

$$[\omega_{B_1, \dot{\theta}_{B_1}}] = \begin{bmatrix} 1 & 0 & S_{12} \\ 0 & C_{11} & -S_{11}C_{12} \\ 0 & S_{11} & C_{11}C_{12} \end{bmatrix} \quad [\omega_{B_1, \dot{\theta}_{B_2}}] = [0]_{3 \times 3}$$

$$[\omega_{B_2, \dot{\theta}_{B_1}}] = [\omega_{B_1, \dot{\theta}_{B_1}}] \quad [\omega_{B_2, \dot{\theta}_{B_2}}] = [R_{B_1}]^T \begin{bmatrix} 1 & 0 & S_{22} \\ 0 & C_{21} & -S_{21}C_{22} \\ 0 & S_{21} & C_{21}C_{22} \end{bmatrix}$$

So, the fixed-frame components of the angular accelerations of the bodies can be written as

$$\{\alpha_{B_1}\} = \{\dot{\omega}_{B_1}\} = [\dot{\omega}_{B_1, \dot{\theta}_{B_1}}] \{\ddot{\theta}_{B_1}\} + [\dot{\omega}_{B_1, \dot{\theta}_{B_1}}] \{\dot{\theta}_{B_1}\}$$

$$\{\alpha_{B_2}\} = \{\dot{\omega}_{B_2}\} = [\dot{\omega}_{B_1, \dot{\theta}_{B_1}}] \{\ddot{\theta}_{B_1}\} + [\dot{\omega}_{B_1, \dot{\theta}_{B_1}}] \{\dot{\theta}_{B_1}\} + [\dot{\omega}_{B_2, \dot{\theta}_{B_2}}] \{\ddot{\theta}_{B_2}\} + [\dot{\omega}_{B_2, \dot{\theta}_{B_2}}] \{\dot{\theta}_{B_2}\}$$

where

$$[\dot{\omega}_{B_1, \dot{\theta}_{B_1}}] = \frac{d}{dt} \begin{bmatrix} 1 & 0 & S_{12} \\ 0 & C_{11} & -S_{11}C_{12} \\ 0 & S_{11} & C_{11}C_{12} \end{bmatrix} = \begin{bmatrix} 0 & 0 & \dot{\theta}_{12}C_{12} \\ 0 & -\dot{\theta}_{11}S_{11} & (\dot{\theta}_{12}S_{11}S_{12} - \dot{\theta}_{11}C_{11}C_{12}) \\ 0 & \dot{\theta}_{11}C_{11} & -(\dot{\theta}_{11}S_{11}C_{12} + \dot{\theta}_{12}C_{11}S_{12}) \end{bmatrix}$$

$$\begin{aligned}
\left[\dot{\omega}_{B_2, \dot{\omega}_{B_2}} \right] &= \frac{d}{dt} \left(\left[R_{B_1} \right]^T \begin{bmatrix} 1 & 0 & S_{22} \\ 0 & C_{21} & -S_{21}C_{22} \\ 0 & S_{21} & C_{21}C_{22} \end{bmatrix} \right) \\
&= \left[\dot{R}_{B_1} \right]^T \begin{bmatrix} 1 & 0 & S_{22} \\ 0 & C_{21} & -S_{21}C_{22} \\ 0 & S_{21} & C_{21}C_{22} \end{bmatrix} + \left[R_{B_1} \right]^T \begin{bmatrix} 0 & 0 & \dot{\theta}_{22}C_{22} \\ 0 & -\dot{\theta}_{21}S_{21} & (\dot{\theta}_{22}S_{21}S_{22} - \dot{\theta}_{21}C_{21}C_{22}) \\ 0 & \dot{\theta}_{21}C_{21} & -(\dot{\theta}_{21}S_{21}C_{22} + \dot{\theta}_{22}C_{21}S_{22}) \end{bmatrix} \\
&= \left[\tilde{\omega}_{B_1} \right] \left[R_{B_1} \right]^T \begin{bmatrix} 1 & 0 & S_{22} \\ 0 & C_{21} & -S_{21}C_{22} \\ 0 & S_{21} & C_{21}C_{22} \end{bmatrix} + \left[R_{B_1} \right]^T \begin{bmatrix} 0 & 0 & \dot{\theta}_{22}C_{22} \\ 0 & -\dot{\theta}_{21}S_{21} & (\dot{\theta}_{22}S_{21}S_{22} - \dot{\theta}_{21}C_{21}C_{22}) \\ 0 & \dot{\theta}_{21}C_{21} & -(\dot{\theta}_{21}S_{21}C_{22} + \dot{\theta}_{22}C_{21}S_{22}) \end{bmatrix}
\end{aligned}$$

Angular Velocity Components as Generalized Speeds

The *fixed-frame components* of ${}^R\omega_{B_2}$ the angular velocity of B_2 in the fixed frame R can be written as

$$\left\{ \omega_{B_2} \right\} = \left\{ \omega_{B_1} \right\} + \left[R_{B_1} \right]^T \left\{ \hat{\omega}_{B_2} \right\} = \left[\omega_{B_2, \omega_{B_1}} \right] \left\{ \omega_{B_1} \right\} + \left[\omega_{B_2, \hat{\omega}_{B_2}} \right] \left\{ \hat{\omega}_{B_2} \right\}$$

with

$$\left[\omega_{B_2, \omega_{B_1}} \right] = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix} \quad \left[\omega_{B_2, \hat{\omega}_{B_2}} \right] = \left[R_{B_1} \right]^T$$

This equation can be differentiated to give the *fixed-frame components* of ${}^R\alpha_{B_2}$

$$\left\{ \alpha_{B_2} \right\} = \left\{ \dot{\omega}_{B_2} \right\} = \left\{ \dot{\omega}_{B_1} \right\} + \left[R_{B_1} \right]^T \left\{ \dot{\hat{\omega}}_{B_2} \right\} + \left[\dot{R}_{B_1} \right]^T \left\{ \hat{\omega}_{B_2} \right\}$$

or

$$\boxed{\left\{ \alpha_{B_2} \right\} = \left\{ \dot{\omega}_{B_1} \right\} + \left[R_{B_1} \right]^T \left\{ \dot{\hat{\omega}}_{B_2} \right\} + \left[\tilde{\omega}_{B_1} \right] \left[R_{B_1} \right]^T \left\{ \hat{\omega}_{B_2} \right\}}$$

The *body-frame components* of ${}^R\omega_{B_2}$ the angular velocity of B_2 in the fixed frame R can be written as

$$\{\omega'_{B_2}\} = \left[{}^{B_1}R_{B_2} \right] \{\omega'_{B_1}\} + \{\dot{\omega}'_{B_2}\} = \left[\omega'_{B_2, \omega'_{B_1}} \right] \{\omega'_{B_1}\} + \left[\omega'_{B_2, \dot{\omega}'_{B_2}} \right] \{\dot{\omega}'_{B_2}\} \quad \text{“} B_2 \text{ Components”}$$

with

$$\left[\omega'_{B_2, \omega'_{B_1}} \right] = \left[{}^{B_1}R_{B_2} \right] \quad \left[\omega'_{B_2, \dot{\omega}'_{B_2}} \right] = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

Differentiating this equation gives the B_2 components of ${}^R\alpha_{B_2}$

$$\begin{aligned} \{\alpha'_{B_2}\} &= \{\dot{\omega}'_{B_2}\} \\ &= \left[\omega'_{B_2, \omega'_{B_1}} \right] \{\dot{\omega}'_{B_1}\} + \left[\dot{\omega}'_{B_2, \omega'_{B_1}} \right] \{\omega'_{B_1}\} + \left[\omega'_{B_2, \dot{\omega}'_{B_2}} \right] \{\dot{\dot{\omega}'_{B_2}}\} + \left[\dot{\omega}'_{B_2, \dot{\omega}'_{B_2}} \right] \{\dot{\omega}'_{B_2}\} \\ &= \left[{}^{B_1}R_{B_2} \right] \{\dot{\omega}'_{B_1}\} + \left[{}^{B_1}\dot{R}_{B_2} \right] \{\omega'_{B_1}\} + \{\dot{\dot{\omega}'_{B_2}}\} \\ &= \left[{}^{B_1}R_{B_2} \right] \{\dot{\omega}'_{B_1}\} + \left[\tilde{\omega}'_{B_2} \right]^T \left[{}^{B_1}R_{B_2} \right] \{\omega'_{B_1}\} + \{\dot{\dot{\omega}'_{B_2}}\} \end{aligned}$$

or

$$\boxed{\{\alpha'_{B_2}\} = \left[{}^{B_1}R_{B_2} \right] \{\dot{\omega}'_{B_1}\} - \left[\tilde{\omega}'_{B_2} \right] \left[{}^{B_1}R_{B_2} \right] \{\omega'_{B_1}\} + \{\dot{\dot{\omega}'_{B_2}}\}} \quad \text{“} B_2 \text{ Components”}$$