


**ME 5550 Intermediate Dynamics**  
**Simple Angular Motion**

**Simple Angular Velocity**

The rigid body  $B$  shown in the diagram below rotates about the  $Z$ -axis. The  $XYZ$  reference frame is a fixed frame, while the  $xyz$  reference frame is fixed in (and rotates with) the body. The  $XYZ$  reference frame is represented by the unit vector set  $R: (\underline{i}, \underline{j}, \underline{k})$ , and the  $xyz$  reference frame is represented by the unit vector set  $B: (\underline{e}_1, \underline{e}_2, \underline{k})$ . Note that *each* unit vector set is a **right-handed** set, that is  $\underline{i} \times \underline{j} = \underline{k}$  and  $\underline{e}_1 \times \underline{e}_2 = \underline{k}$ .

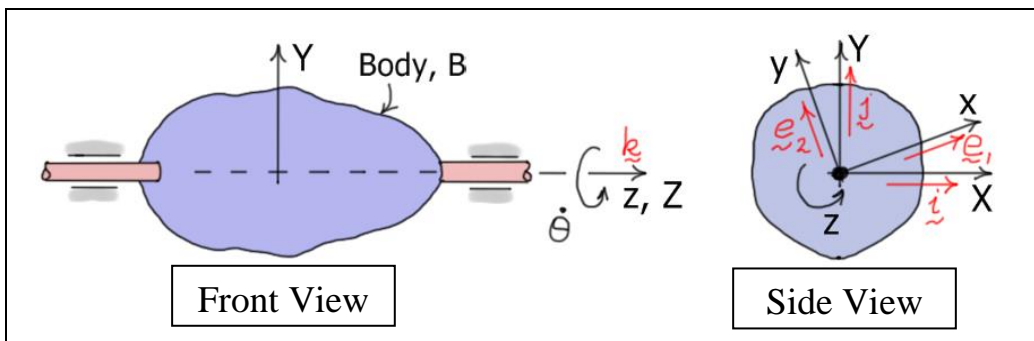

The unit vectors fixed in the body  $B$  can be *differentiated* by using the concept of **angular velocity**. It can be shown that

$$\boxed{\frac{{}^R d \underline{e}_i}{dt} = {}^R \underline{\omega}_B \times \underline{e}_i} \quad (i=1,2)$$

where  $\frac{{}^R d \underline{e}_i}{dt}$  represents the **derivative** of the unit vector  $\underline{e}_i$  in the **reference frame**  $R$ , and

${}^R \underline{\omega}_B = \dot{\theta} \underline{k}$  is the **angular velocity** of the body  $B$  in the **reference frame**  $R$ .

**Aside:**

$$\begin{aligned} \frac{{}^R d \underline{e}_1}{dt} &= \frac{{}^R d}{dt} (C_\theta \underline{i} + S_\theta \underline{j}) \\ &= \dot{\theta} (-S_\theta \underline{i} + C_\theta \underline{j}) \\ &= \dot{\theta} \underline{e}_2 \\ &= \dot{\theta} (\underline{k} \times \underline{e}_1) \\ &= {}^R \underline{\omega}_B \times \underline{e}_1 \end{aligned}$$

## Differentiation of Unit Vectors – General Case

Consider now a rigid body  $B$  moving in three-dimensional space. In general, given a set of unit vectors  $(\underline{e}_1, \underline{e}_2, \underline{e}_3)$  fixed in  $B$ , it can be shown that

$$\boxed{\frac{{}^R d\underline{e}_i}{dt} = {}^R \underline{\omega}_B \times \underline{e}_i} \quad (i = 1, 2, 3)$$

where, as before,  $\frac{{}^R d\underline{e}_i}{dt}$  represents the derivative of the unit vector  $\underline{e}_i$  in the reference frame  $R$ ,

and  ${}^R \underline{\omega}_B$  is the angular velocity of the body  $B$  in the reference frame  $R$ . What is needed now is a means of calculating  ${}^R \underline{\omega}_B$ , if the body doesn't have simple angular motion.



## Simple Angular Acceleration

The angular acceleration of  $B$  in  $R$  is found by *differentiating* the angular velocity vector. That is,

$$\boxed{{}^R \underline{\alpha}_B = \frac{{}^R d}{dt} ({}^R \underline{\omega}_B) = \ddot{\theta} \underline{k}}$$

## Kinematics of Fixed Axis Rotation

Consider the rigid body  $B$  shown in the diagram below. The fixed reference frame is represented by the unit vector set  $R: (\underline{i}, \underline{j}, \underline{k})$ , and the rotating reference frame is represented by the unit vector set  $B: (\underline{e}_1, \underline{e}_2, \underline{e}_3)$ . All points of  $B$  travel in a circular path around the fixed axis. The *velocity* and *acceleration* of any point within the body can be determined by differentiating (with respect to time) its position vector  $\underline{r}_A$  relative to any point on the fixed axis.

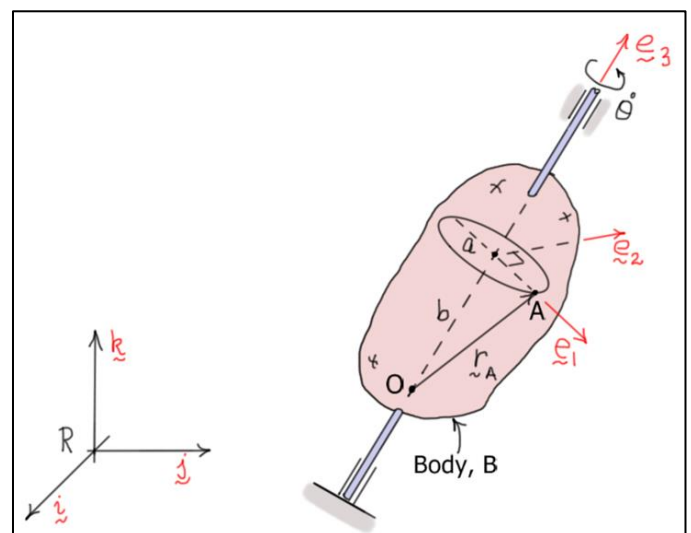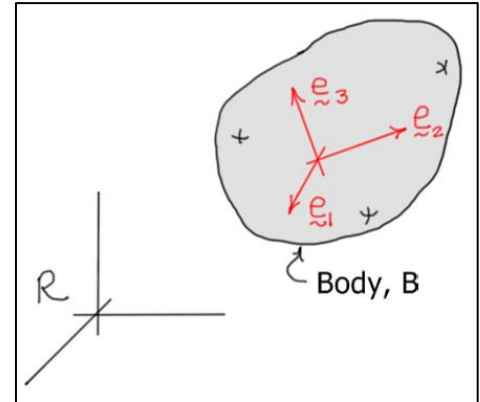

For example, the velocity of point A can be calculated as follows

$$\begin{aligned}
 \underline{v}_A &= \frac{{}^R d}{dt} (ae_{\underline{z}_1} + be_{\underline{z}_3}) = a \frac{{}^R de_{\underline{z}_1}}{dt} + b \frac{{}^R de_{\underline{z}_3}}{dt} \\
 &= a({}^R \underline{\omega}_B \times e_{\underline{z}_1}) + b({}^R \underline{\omega}_B \times e_{\underline{z}_3}) \\
 &= {}^R \underline{\omega}_B \times (ae_{\underline{z}_1} + be_{\underline{z}_3}) \\
 &= {}^R \underline{\omega}_B \times \underline{r}_A
 \end{aligned}$$

Performing the cross product in the last equation gives  $\underline{v}_A = a\dot{\theta}e_{\underline{z}_2}$ . Note the velocity is **tangent**

to the **circular path**. Similarly, the acceleration of A can be calculated as follows

$$\begin{aligned}
 {}^R \underline{a}_A &= \frac{{}^R d}{dt} ({}^R \underline{v}_A) = \frac{{}^R d}{dt} ({}^R \underline{\omega}_B \times \underline{r}_A) \\
 &= ({}^R \underline{\alpha}_B \times \underline{r}_A) + ({}^R \underline{\omega}_B \times {}^R \underline{v}_A)
 \end{aligned}$$

Performing the operations in this last equation gives  ${}^R \underline{a}_A = -a\dot{\theta}^2 e_{\underline{z}_1} + a\ddot{\theta}e_{\underline{z}_2}$ . Note the acceleration has components both **normal** and **tangent** to the circular path.