


**ENGR 1990 Engineering Mathematics**  
**Homework #10 – Integrals**

1. A hardening spring has the force-displacement function  $f(x) = 100 + 10x + x^2$  (lb). The work done by the spring as it is stretched over some displacement interval is the negative of the integral of the force-displacement function over that interval. Estimate the integral and the work done by the spring as it is stretched from  $x = 0$  to  $x = 2.5$  inches by breaking the area into a sequence of trapezoids of width  $\Delta x = 0.5$  (in).

$x$	$f(x)$	Interval	$f_{\text{avg}}$	$\Delta x$
0		--		
0.5		1		0.5
1		2		0.5
1.5		3		0.5
2		4		0.5
2.5		5		0.5
		$\Sigma$		

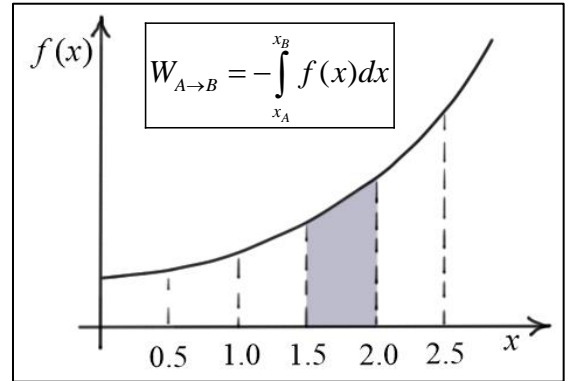


2. Using the same spring force-displacement function given in problem (1), find the work done by the spring using anti-derivatives. Calculate the percent error of the estimate found in problem (1).

3. A car has the acceleration profile shown, and its initial position and velocity are zero. Given that

$$\boxed{v(t) = \int a(t) dt} \quad \text{and} \quad \boxed{s(t) = \int v(t) dt},$$

find (a) the velocity function  $v(t)$ , (b) the displacement function  $s(t)$ , and (c) the total distance traveled by the car for  $0 \leq t \leq 20$  (sec). Sketch the functions.

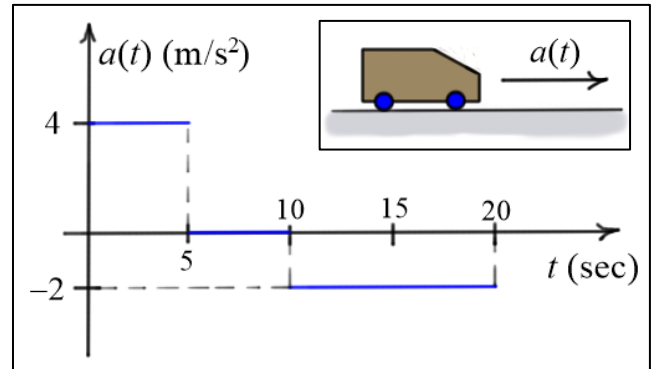


4. A ball that is thrown upward has velocity  $\boxed{v(t) = 75 - 32.2t}$  (ft/s). Given that the

displacement function of the ball is  $\boxed{y(t) = \int v(t) dt}$ , find (a) the displacement of the ball from its original position after 3.5 seconds, and (b) the total distance traveled by the ball during the 3.5 second period.

5. A ball is thrown upward with an initial velocity of  $v_0 = 20$  (m/s) from an initial height of  $y_0 = 8$  (m) and has a constant downward acceleration of  $a_0 = -9.81$  (m/s<sup>2</sup>). Given that

$\boxed{v(t) = \int a(t) dt}$  and  $\boxed{y(t) = \int v(t) dt}$ , find (a) the velocity function  $v(t)$ , and (b) the position function  $y(t)$ .




6. The simply supported beam has a uniformly distributed load over the left half of the beam. For a beam of length  $L=10$  (ft) and a load  $w=100$  (lb/ft), the internal shearing force is

$$\boxed{V(x) = 375 - 100x \text{ (lb)}} \quad 0 \leq x \leq 5 \text{ (ft)}$$

$$\boxed{V(x) = -125 \text{ (lb)}} \quad 5 \leq x \leq 10 \text{ (ft)}$$


Given that the internal bending moments at  $A$  and  $B$  are zero, find  $M(x) = \int V(x) dx$  the internal bending moment as a function of  $x$ .

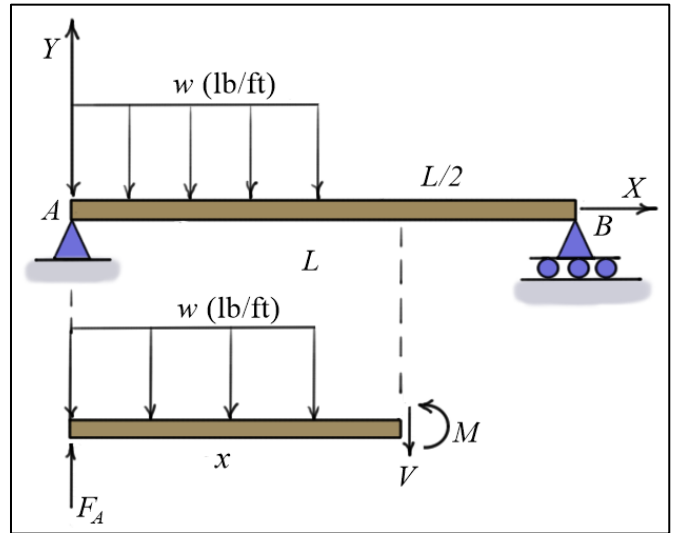

7. A current  $i(t) = 2e^{-2t}$  (amps) is applied to a capacitor with capacitance

$C = 0.25$  (f). Given that  $v(t) = \frac{1}{C} \int i(t) dt$ , find the

- voltage  $v(t)$  assuming  $v(0) = 0$
- power,  $p(t) = v(t) \cdot i(t)$
- total energy,  $W(t) = \int_0^t p(t) dt$  (joules)

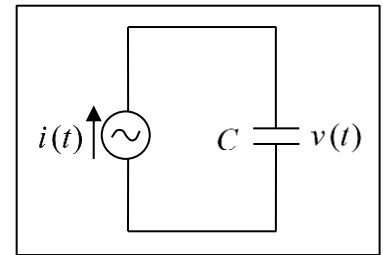

What is the energy at  $t = 1, 2, 3, 4$  (sec)? What is the limit of the energy as  $t \rightarrow \infty$ ?

8. A voltage  $v(t) = 10 \sin(120\pi t)$  (volts) is applied to an inductor with inductance

$L = 250$  (mh). Find the current  $i(t)$ , given that  $i(t) = \frac{1}{L} \int v(t) dt$ . Assume

$i(0) = 0$ .

